



DENALI Plow Mount MA11117

Honda Ranger 350/400

Thank you for purchasing our DENALI plow mount. You now own a premium custom plow mount to allow you to use your plow with your ATV. Please note the following instructions and heed all warnings.

- Your ATV and/or plow system can cause death or injury, please use caution and common sense when operating your unit.
- Read your Plow Operator Manual, your Winch Operator Manual, and all warning labels before operating your ATV.
- Operate your ATV at a walking speed with the blade installed. Do not exceed 5 mph (8 km/h), even with the blade up.
- Do not operate the ATV on slopes greater than 10 degrees with the plow installed.
- Always lower the plow to the down position before leaving your ATV unattended.

SEVERE INJURY OR DEATH MAY RESULT IF YOU ARE NEGLIGENT.

Honda Rancher 350/400
MA11117


motoalliance
22000 Industrial Blvd
Rogers, MN 55374
866.527.7637

PARTS LIST

1 3/8-16 x 1" Hex Bolt
6 5/16" Nylock Nut
2 Hex Bolt, 5/16-18 x 3/4"
1 3/8" Nylock Nut
2 Hex Bolt, 5/16-18 x 1-3/4"
1 Frame Mount, Plow, Rancher
2 U-Bolt, 5/16-18 x 1-1/4" (Fastenal: 42018)

CAUTION

USE EXTREME CAUTION WHEN DRILLING THROUGH THE SKIDPLATE. EVERY EFFORT HAS BEEN MADE TO ENSURE THAT THE HOLE POSITIONS ON THE CROSSMEMBER WILL NOT ALLOW THE DRILL BIT TO CONTACT ANYTHING ELSE ON THE BIKE. BUT VARIATIONS IN MANUFACTURING AND INSTALLATION MAY CHANGE THAT. KEEP AWAY ALL HANDS AND LIMBS THAT MAY BE IN THE PATH OF THE ROTATING BIT. ONLY DRILL THROUGH THE SKIDPLATE AND NOTHING ELSE ON THE BIKE. NOT DOING SO MAY SERIOUSLY DAMAGE/INJURE THE BIKE AND OPERATOR.

CAUTION

FAILURE TO TIGHTEN THE MOUNTING BRACKET BOLTS MAY CAUSE SERIOUS DAMAGE TO YOUR PLOW MOUNT AND BIKE. BE SURE TO TIGHTEN THEM SNUGGLY.

Plow Mount Assembly:

Note: Depending on the ATV model it may be necessary to remove the plastic skid plate for installation of plow mount plate.
Fasten the frame bracket to the bottom side

of the ATV's frame tubes as shown in Figure 1.

For 2001 or older model Ranchers, attach the frame bracket using the two 5/16" holes in the rear that should line up with the holes in the frame gussets. Secure the bracket to the frame with two 5/16-18 x 3/4" Bolts and 5/16" Nylock nuts.

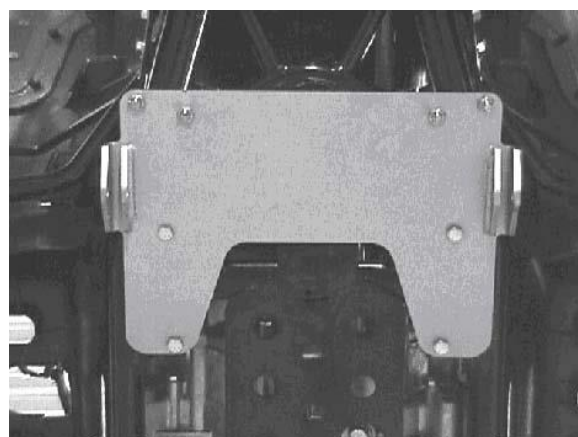


Figure 1

For 2002 or newer models, attach the mount using the center slots. Before you can attach the mount, you will have to drill through the skid plate as shown in Figure 2. Using a 5/16" drill bit, drill through the existing holes on the bike located on the inside of the tubing and near the front of the bike. Attach the bike to the chassis using two 5/16-18 x 1-3/4" Bolts and 5/16" Nylock nuts.



Figure 2

Install both U-Bolts over the top of the frame tubes and into the frame bracket (Fig. 3). Use a 1/2" socket and ratchet to secure the U-Bolts with 5/16" Nylock nuts. ***Do not over tighten the U-Bolts as this can bend the frame bracket.***

Tighten all fasteners to the following specifications.

Torque 5/16" Bolts: 11 ft-lb (15 N-m)



Figure 3

Plow Installation:

1. Slide the plow into position with the tubes under the ATV. Lift the end of the tube assembly into position so the holes in the tube wings line up with the 3/8" holes in the frame brackets (Figure 2).
2. A Phillips head screwdriver may be used to align the holes. Insert both 3/8" pins and hook the retaining clips on the ends of the pins to secure the plow to the ATV.
3. The plate should now be a permanent part of your ATV and will not interfere with clearance. The plow can be easily attached and detached on the welded u-bolt with the clevis hook on a winch or a manual lift assembly.

Plow mount installation is now complete.