



DENALI Plow Mount MA11165 CF-Moto 800

Thank you for purchasing our DENALI plow mount. You now own a premium custom plow mount to allow you to use your plow with your ATV. Please note the following instructions and heed all warnings.


- Your ATV and/or plow system can cause death or injury, please use caution and common sense when operating your unit.
- Read your Plow Operator Manual, your Winch Operator Manual, and all warning labels before operating your ATV.
- Operate your ATV at a walking speed with the blade installed. Do not exceed 5 mph (8 km/h), even with the blade up.
- Do not operate the ATV on slopes greater than 10 degrees with the plow installed.
- Always lower the plow to the down position before leaving your ATV unattended.

SEVERE INJURY OR DEATH MAY RESULT IF YOU ARE NEGLIGENT.

Please verify that all hardware and parts are included in your package.

Kit Contents:

Item Number	Description	Quantity
1	MA11165-W1 Main Mounting Plate	1
2	MA11165-3 Top Plate	1
3	3/8"-16 x 2.5" Serrated Flange Bolt	8
4	3/8"-16 Serrated Flange Nut	8

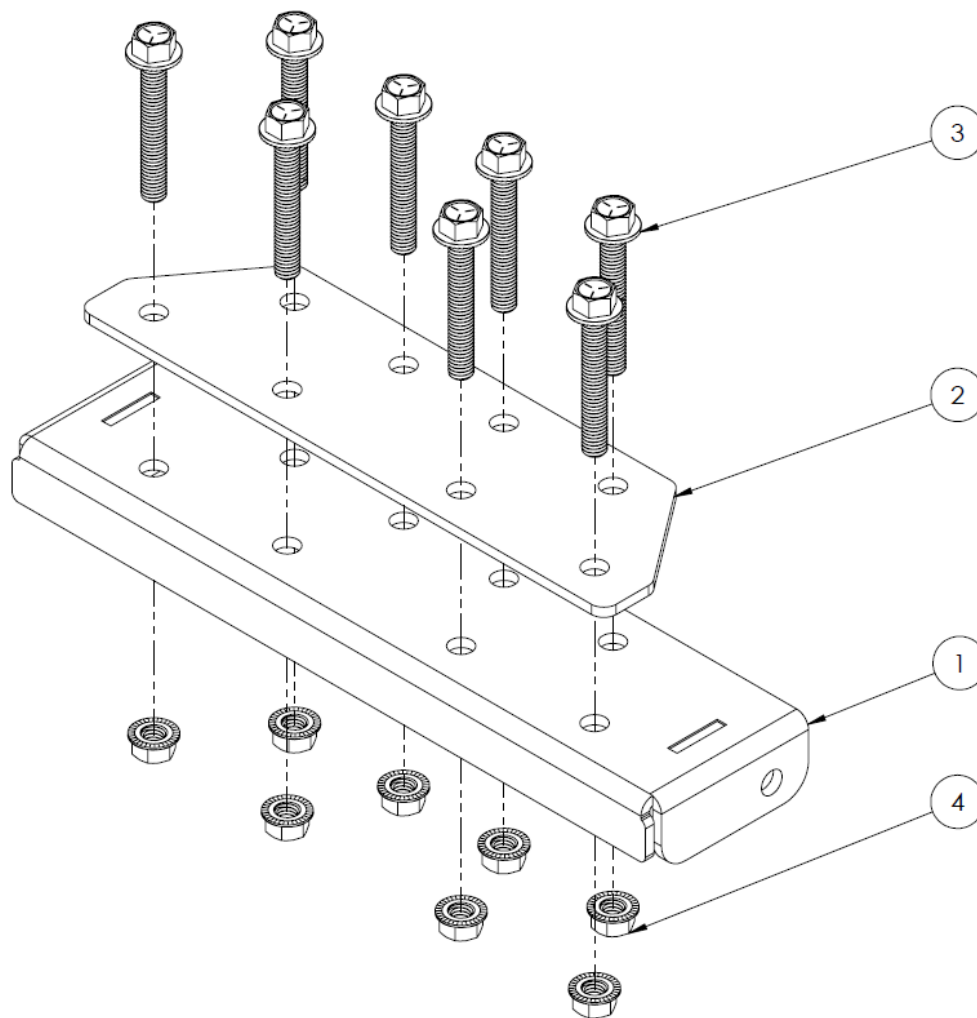

Plow Mount Assembly:

1. Remove the lower front plastic brush guard as shown in Figure 1.



Figure 1

2. Remove the underbody plastic brush guard as shown in Figure 2.

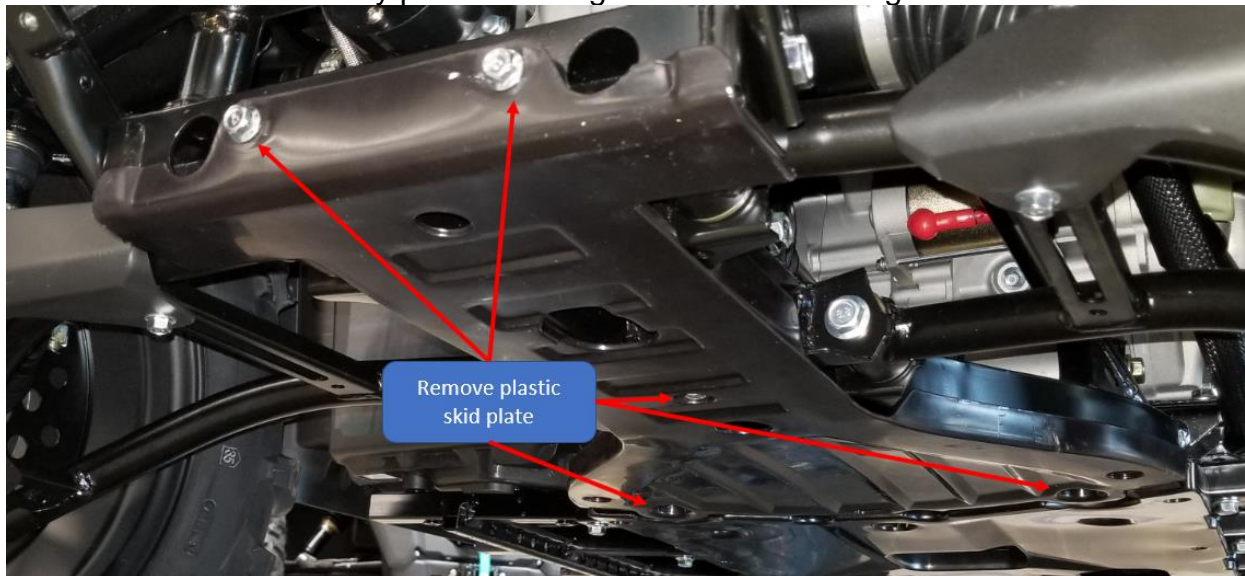


Figure 2

3. Place four of the 3/8" bolts into the center most holes of the top plate. Position the top plate over the frame rails so that the four bolts press up against the frame as shown in Figure 3.
Note: the top plate will slide under the silver-looking brake line on the right-hand side of the vehicle.

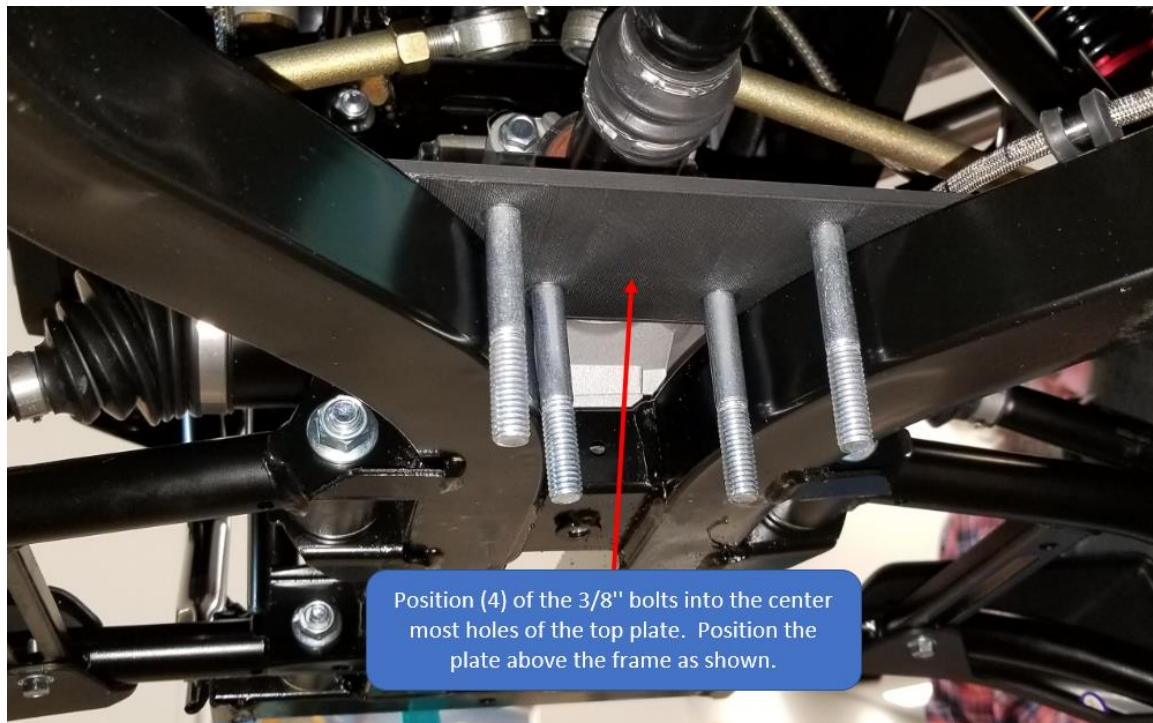


Figure 3

4. Loosely install four of the 3/8" Serrated Flange Nuts as shown in Figure 4.



Figure 4

5. Install the remaining 3/8" bolts through the top plate and attach the remaining serrated flange nuts as shown in Figure 5.



Figure 5

6. Tighten down all the hardware and reattach the front plastic brush guard.
7. Install the plow per the manufacturer's installation instructions

After First Time Use

After the first use of your plow, check and retighten all hardware. The frame can flex during a ride and the plow mount may have loosened.