



DENALI Plow Mount MA11764 Textron Stampede

Thank you for purchasing our DENALI plow mount. You now own a premium custom plow mount to allow you to use your plow with your SxS. Please note the following instructions and heed all warnings.

- Your UTV/SxS and/or plow system can cause death or injury, please use caution and common sense when operating your unit.
- Read your Plow Operator Manual, your Winch Operator Manual, and all warning labels before operating your UTV/SxS.
- Operate your UTV/SxS at a walking speed with the blade installed. Do not exceed 5 mph (8 km/h), even with the blade up.
- Do not operate the UTV/SxS on slopes greater than 10 degrees with the plow installed.
- Always lower the plow to the down position before leaving your UTV/SxS unattended.

SEVERE INJURY OR DEATH MAY RESULT IF YOU ARE NEGLIGENT. .

Please verify that all hardware and parts are included in your package.

Kit Content2:

Item Number	Quantity	Description
1	1	MA11764-W1 Main Mounting Plate
2	1	3/8"-16 x 1" Serrated Flange Bolt
3	1	3/8"-16 Serrated Flange Nut
4	2	M10 Flat Washer
5	2	M10 Lock Washer
6	3	M10-1.5 x 50mm Hex Head Bolt

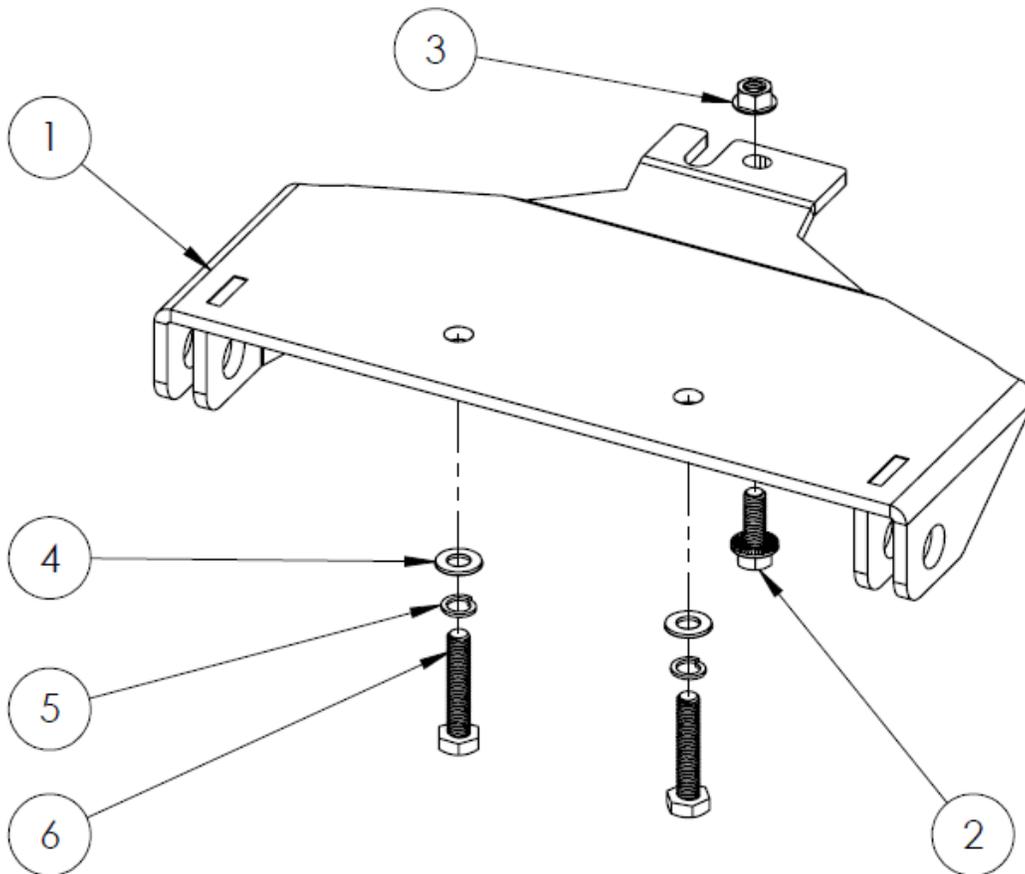


Figure 1

Textron Stampede Installation Instructions

1. Remove the two M10 bolts on the bottom of the bumper. **Figure 2** shows the plow mount installed, the red circles mark the location of the original bumper bolts.

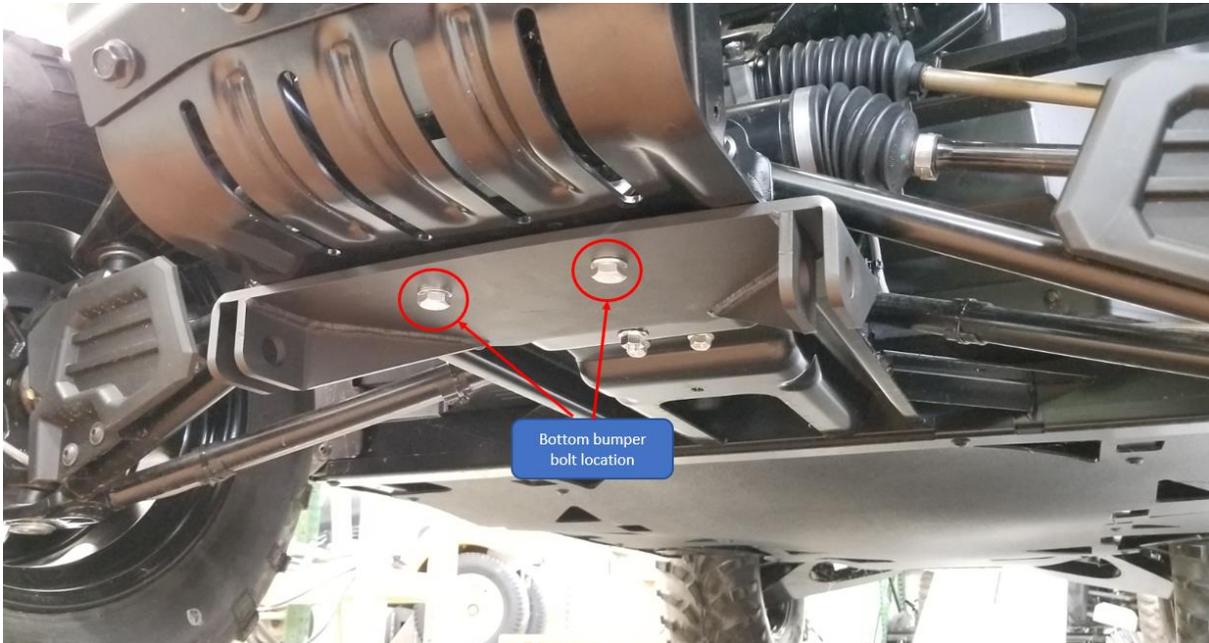


Figure 2

2. Lift the MA11764 Mounting Plate into place as shown in **Figure 2**. Slide the back flange into slotted hole by the differential.
3. Secure the front of the mount using the provided M10 Washers and M10-1.5 x 50mm Hex Bolts as shown in **Figure 1** and **Figure 2**. Do not tighten fully at this time.

4. Secure the back of the mount using the 3/8" hardware as shown in **Figure 3**. Do not tighten fully at this time.



Figure 3

5. Verify the mount is square and tighten all hardware.
6. Attach the plow using the quick release pins included with the DENALI Plow Kit.
7. Retighten all hardware as your frame may have flexed and the Plow Mount loosened.