



22000 Industrial Blvd, Rogers, MN 55374 / 1-866-527-7637  
www.motoalliance.com

## DENALI 72" UTV Rubber Flap Kit RF72\_Kit

Thank you for purchasing a DENALI Rubber Flap Kit. You now own a premium, custom Rubber Flap designed to work exclusively with 72" Denali UTV Plows. Please note the following instructions and heed all warnings.

- Your UTV/SxS and/or plow system can cause death or injury. Please use caution and common sense when operating your unit.
- Read your Plow Operator Manual, your Winch Operator Manual, and all warning labels before operating your UTV/SxS.
- Operate your UTV/SxS at a walking speed with the blade installed. Do not exceed 5 mph (8 km/h) even with the blade up.
- Do not operate the UTV/SxS on slopes greater than 10 degrees with the plow installed.
- Always lower the plow to the down position before leaving your UTV/SxS unattended.

**SEVERE INJURY OR DEATH MAY RESULT IF YOU ARE NEGLIGENT.**

## RF72\_Kit

### 72" ATV Rubber Flap Kit

55374



**motoalliance**

22000 Industrial Blvd


Rogers, MN

866.527.7637

Please verify that all hardware and parts are included in your package.

#### Kit Contents:

| Part # | Qty | Description                     |
|--------|-----|---------------------------------|
| 1      | 1   | 72" UTV Rubber Flap             |
| 2      | 2   | HD72_2pc Two Part Hold Down Bar |
| 3      | 8   | 3/8" x 1" Serrated Flange Bolt  |
| 4      | 8   | 3/8" Serrated Flange Nut        |

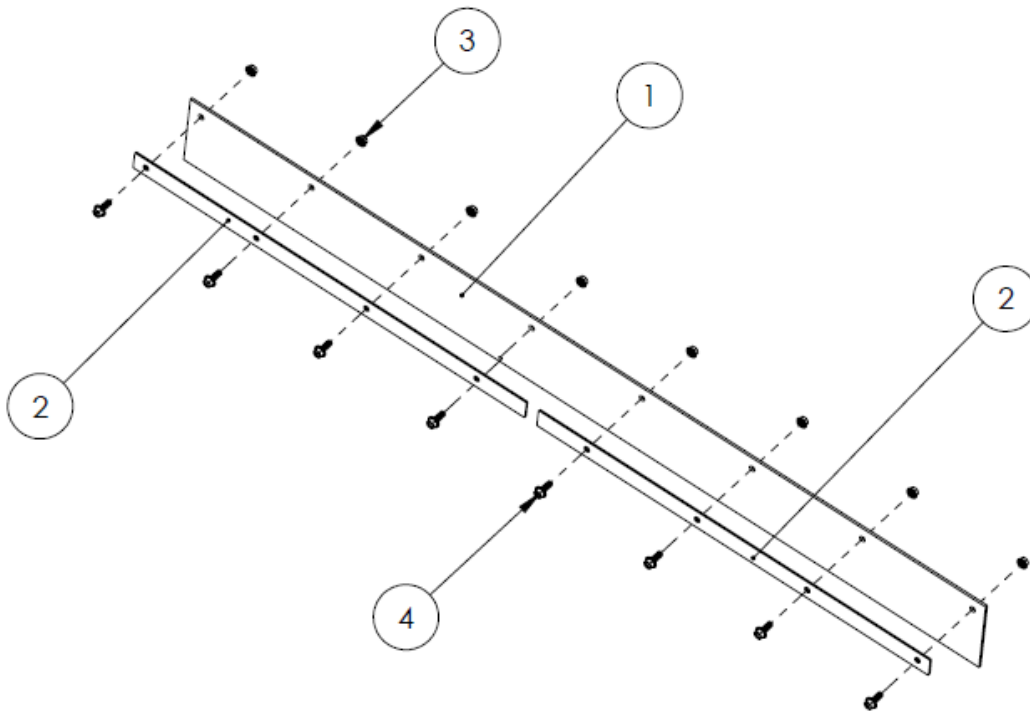

#### RF72\_Kit Assembly View

- Place the 72" UTV Rubber Flap on the top of the Plow Blade, aligning the holes on the Rubber Flap with the holes on the top of the Plow Blade.



**motoalliance**

22000 Industrial Blvd  
Rogers, MN

866.527.7637

**RF72\_Kit**

**72" ATV Rubber Flap Kit**

55374

- 
- Place the two Hold Down Bars on top of the Rubber Flap as shown in the assembly view and use the provided 3/8" hardware to secure the rubber flap and hold down bar to the top of the plow.