



DENALI Plow Mount MA11749 CanAm Maverick

Thank you for purchasing our DENALI plow mount. You now own a premium custom plow mount to allow you to use your plow with your SxS. Please note the following instructions and heed all warnings.

- Your UTV/SxS and/or plow system can cause death or injury, please use caution and common sense when operating your unit.
- Read your Plow Operator Manual, your Winch Operator Manual, and all warning labels before operating your UTV/SxS.
- Operate your UTV/SxS at a walking speed with the blade installed. Do not exceed 5 mph (8 km/h), even with the blade up.
- Do not operate the UTV/SxS on slopes greater than 10 degrees with the plow installed.
- Always lower the plow to the down position before leaving your UTV/SxS unattended.

SEVERE INJURY OR DEATH MAY RESULT IF YOU ARE NEGLIGENT.

Please verify that all hardware and parts are included in your package.

Kit Contents:

Item Number	Quantity	Part Number
1	1	MA11749-W1 Main Mount Plate
2	8	3/8"-16 x 1" Serrated Flange Bolt
3	8	3/8"-16 Serrated Flange Nut

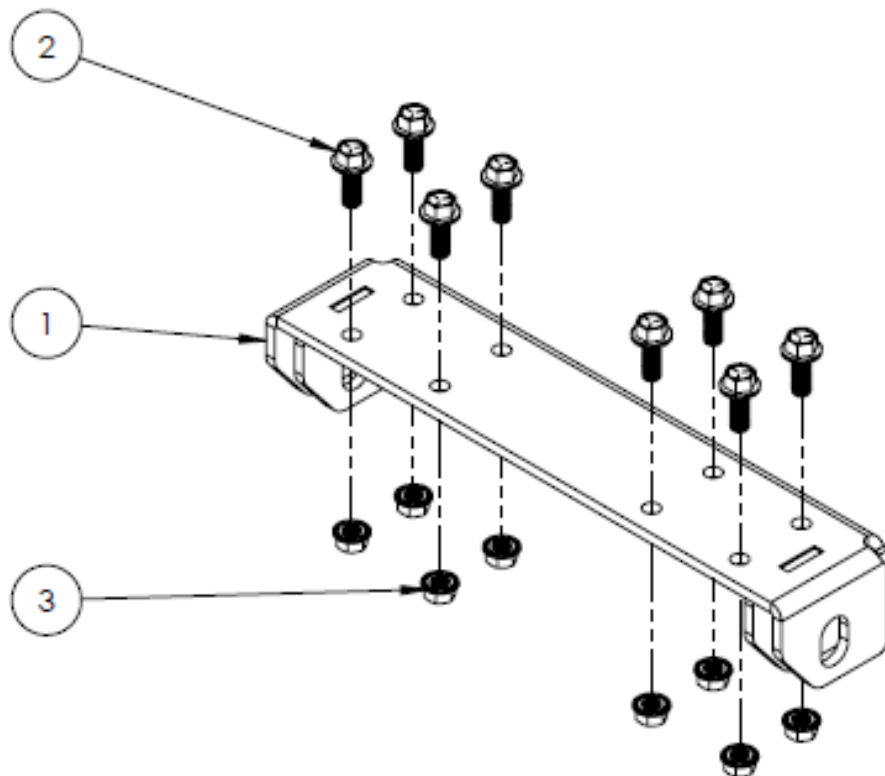


Figure 1

CanAm Maverick Installation Instructions

1. Position the MA11749-W1 Plow Mount under the MA11949-W1 Winch Mount and align the 8 mounting holes. Use the supplied 3/8" hardware to secure the Plow Mount to the Winch Mount.

Note: If the winch is already installed it may be easier to remove it during plow mount installation.

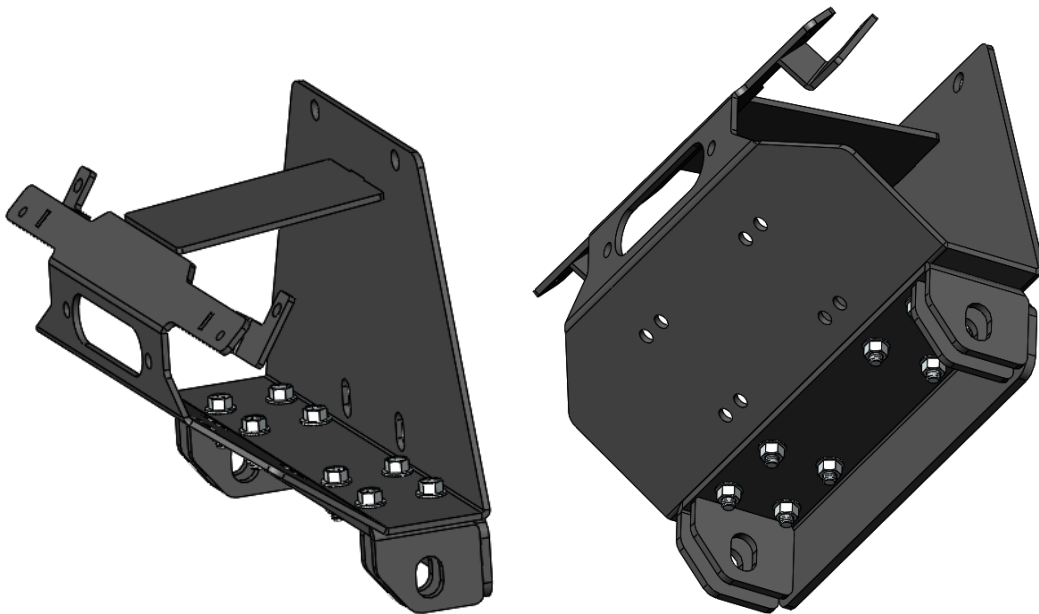


Figure 2